


U Type Flanged Centre Line Butterfly Valve

Technical Details

Specification: DN50-DN1600

The product is applicable to liquid media and gas media, and could bear pressure in a two-way manner; the valve body is rubber lined; the configuration of different materials may be applied to different media. It is applicable to the interception and adjustment of media; and may be set up at high end.

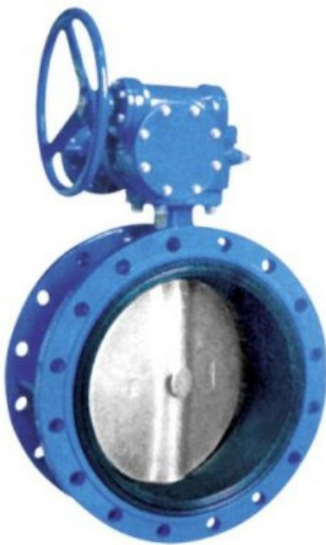

Pressure and temperature

Working pressure: 1.0MPa/1.6MPa

Working temperature: 80°/120°/135°/150°

To be determined according to different rubbers selected

Materials

Valve body: Cast iron/ ductile iron

Valve disc: Ductile iron/ aluminum bronze/ stainless steel

Shaft: Stainless steel

Valve seat: NBR/ chloroprene rubber/ EPDM/ VITON

R.M.V. Valves & Engineered Products

PO Box 25775

Benoni North

1527

South Africa

☎+27(0)76 481-7117 ✦ 📠+27(0)86 603-7651

Web: www.rolandvere.com